

FIRE PROTECTION

Catalogue




Industrial Santafe Ltda
Commercial distribution



GIACOMINI
WATER E-MOTION



FIRE
PROTECTION

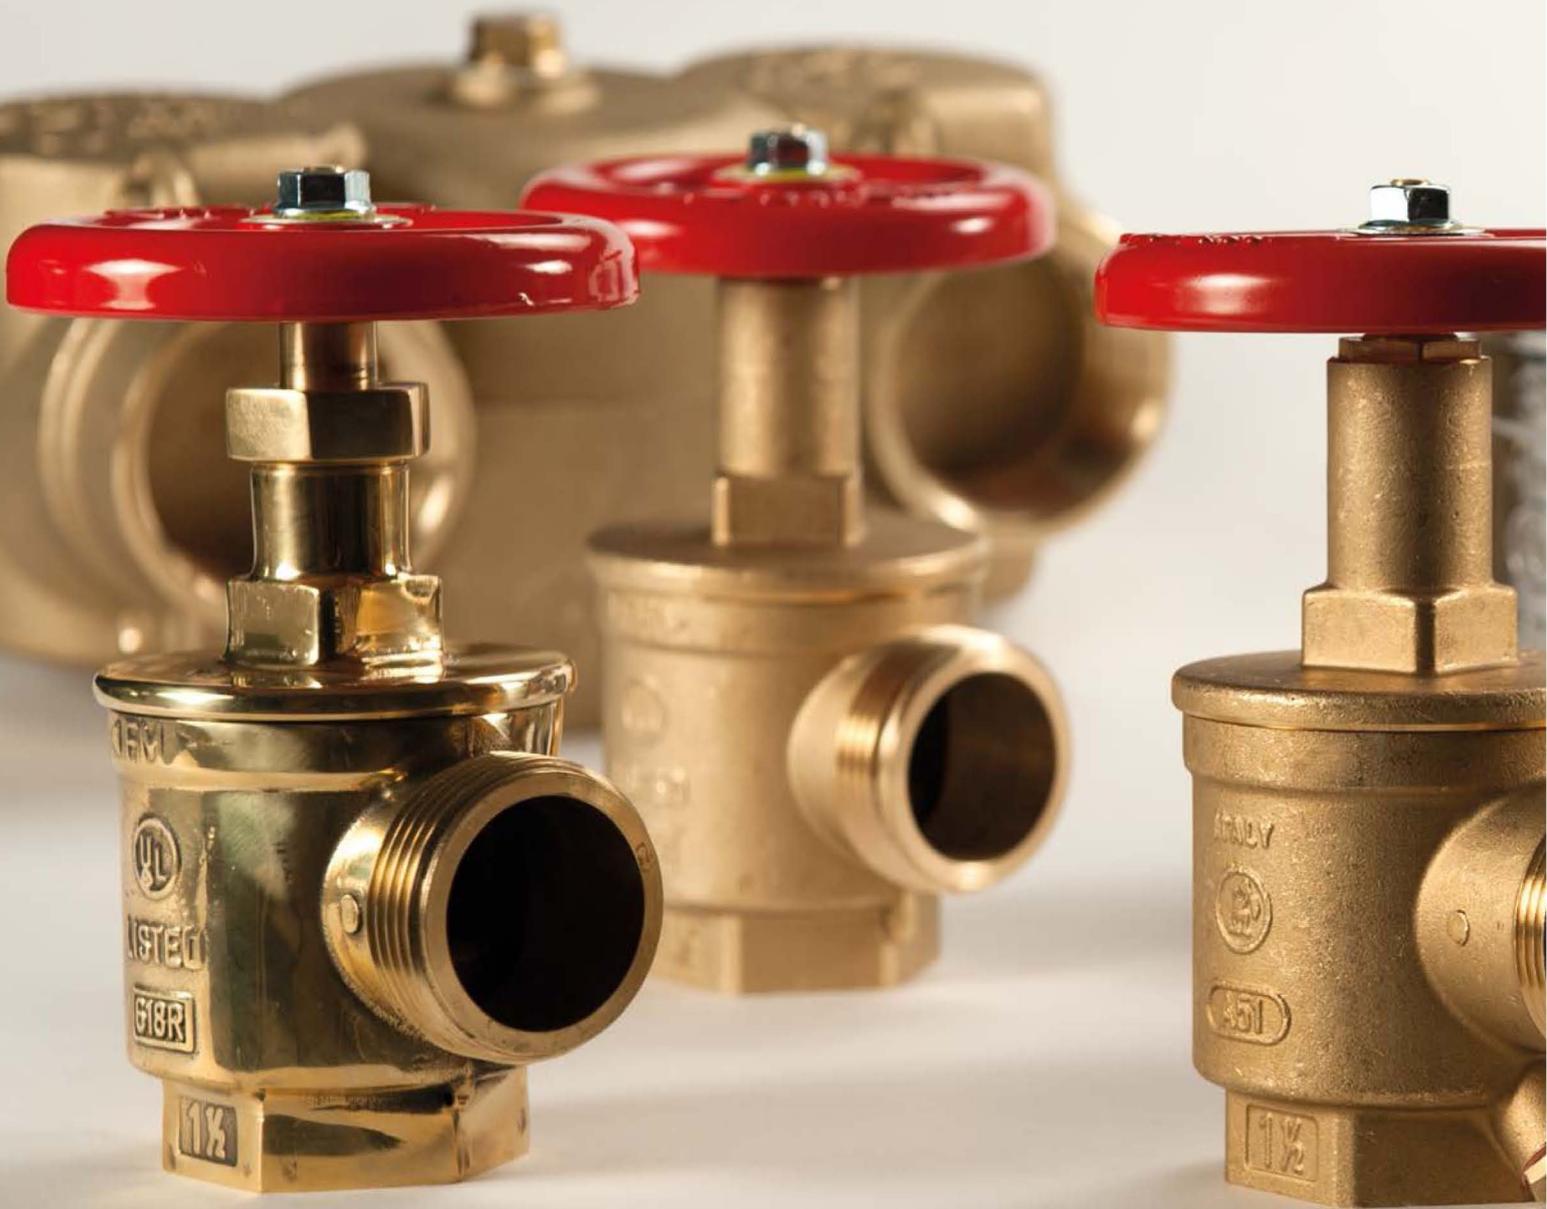


300 PSI rated pressure



A56

ANGLE HOSE VALVE

FEMALE x MALE hose connection



SIZE (a x b)	CERTIFICATIONS	A	B	C	D	E
1 1/2" x 1 1/2"		4 1/32"	7 19/32"	2 1/4"	1 7/8"	3 13/16"
2 1/2" x 2 1/2"		5 1/8"	10 19/32"	3 3/16"	2 5/8"	5 3/8"

Used with a Fire Hose Rack Assembly, or as a Fire Dept. outlet connection.
Standard equipment:
 Female NPT inlet x male hose thread outlet forged brass valve.
 Red handwheel.


300 PSI rated pressure



A156

PRESSURE RESTRICTING VALVE

FEMALE x MALE hose thread - ANGLE



SIZE (a x b)	CERTIFICATIONS	A	B	C	D
1 1/2" x 1 1/2"		4 1/32"	7 19/32"	2 1/4"	1 7/8"
2 1/2" x 2 1/2"		5 1/8"	10 19/32"	3"	2 5/8"

Used with a fire hose rack assembly or as a fire dept. outlet connection.
 Water pressure is controlled by adjustable flow restriction.
 If full flow is required, the restriction may be overridden.
Standard equipment:
 Female NPT inlet x male hose thread outlet forged brass valve.
 Red handwheel.